


WONDERFLOOR


www.wonderfloor.co.in

Antiskid | **SAFETY**
Transport Flooring

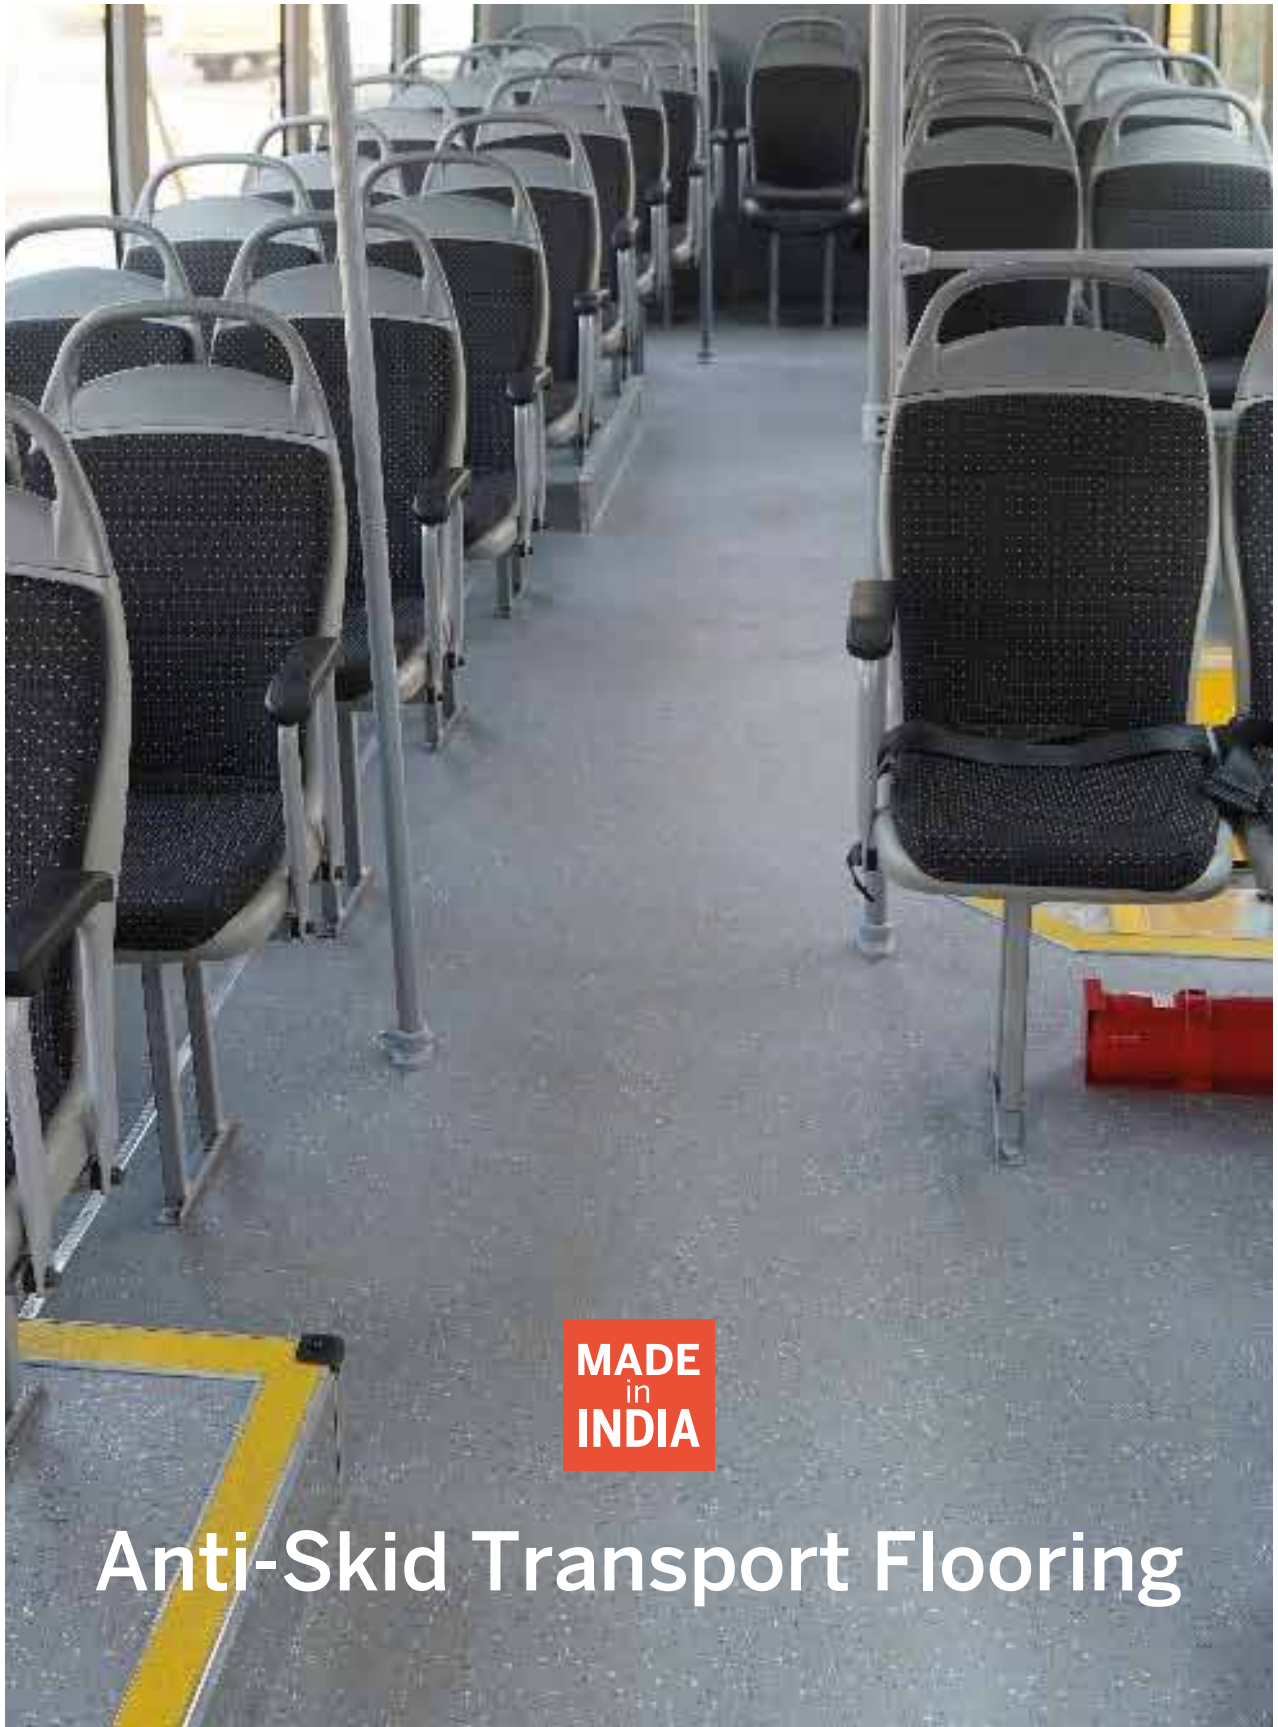


**MADE
in
INDIA**


Anti-Skid Transport Flooring

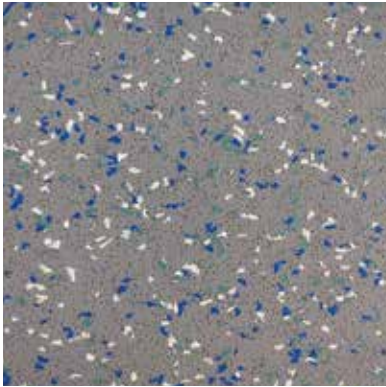


EC GREY

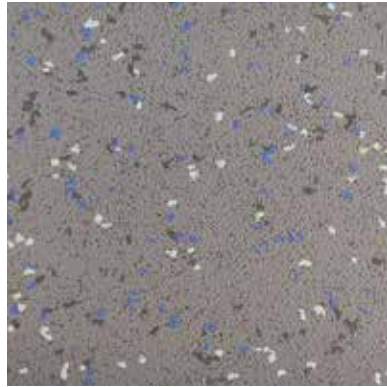


KL GREY

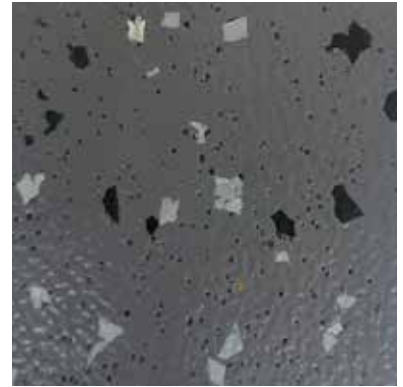


T GREY

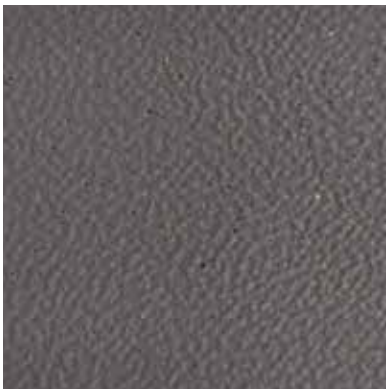

SPARKLE GREY**

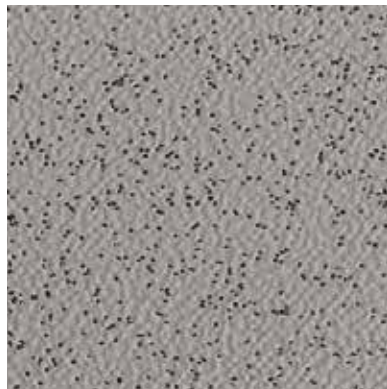


SPARKLE LIGHT GREY**

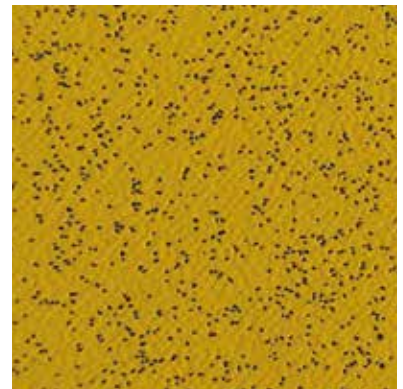


SPARKLE YELLOW




SR BEIGE

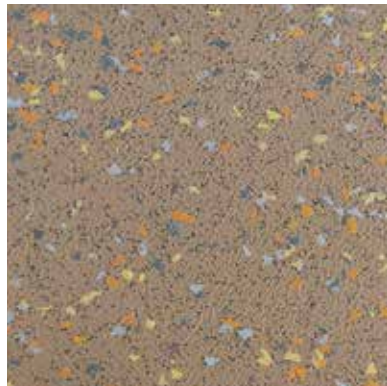


SANDY BROWN

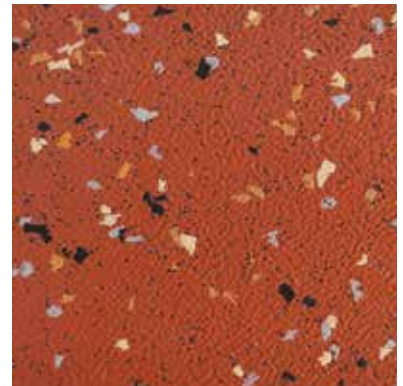


TERRACOTTA

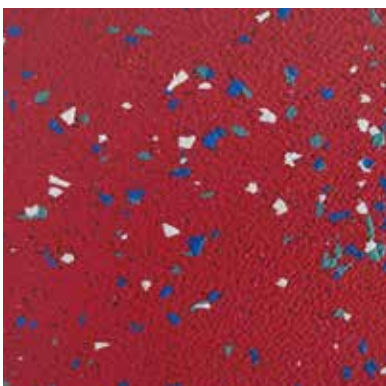

CRIMSON RED

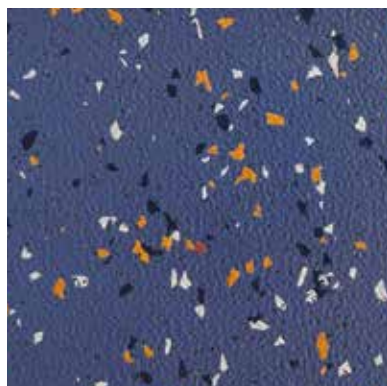

SHATABDI BLUE

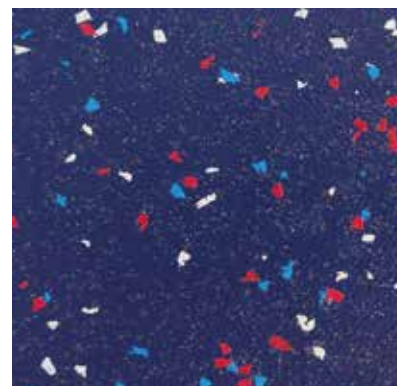

N BLUE

** Against bulk quantity order only

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

SAFETY are special floor coverings embedded with Silicon Carbide (Carborundum) grains on the top surface which provide a very high slip resistance rating. Due to a superior PVC content and Silicon Carbide Grains, these floorings can withstand very high abrasion and are most suitable for areas where there is heavy footfall & anti-slip properties are required like: Buses, Trains, Ramps, Wet Areas, etc. These floorings are also produced with special additives to meet stringent Fire & Smoke properties prevalent for use in Buses & Railway coaches.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RESULTS
THICKNESS (mm)	EN 428	1.50 / 2.00 / 3.00
TOTAL WEIGHT (kgs/sq mtr)	EN 430	2.75 / 3.75 / 5.56
ROLL WIDTH (mtr)	EN 426	1.50 / 2.00
ROLL LENGTH (mtr)	EN 426	15 / 20
RESIDUAL INDENTATION (mm) AFTER STATIC LOAD	EN 433	≤ 0.10mm
DIMENSIONAL STABILITY (%)	EN 434	0.40 (MAX)
MOISTURE MOVEMENT (%)	IS 3462	0.40 (MAX)
FLEXIBILITY AT 0°C/1HR 40mm MANDREL	EN 435	SHALL NOT BREAK, CRACK OR SHOW ANY OTHER SIGN OF FAILURE
ABRASION RESISTANCE	EN: 660-2 / EN 649	WEAR GROUP T
SLIP RESISTANCE	DIN 51130	R 11
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 5db
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS USE
FLAMMABILITY TEST HORIZONTAL / VERTICAL	IS 15061	ARAI PASS
COLOUR FASTNESS TO DAYLIGHT	ISO 105-B02/IS 9766 ISO 877-76	> BLUE WOOL STANDARD 5
RESISTANCE TO CHEMICAL	EN 423	NO VISIBLE CHANGE
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	34, 43

Can be manufactured specifically for Marine usages with low smoke and toxicity value.



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6:30pm)

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

