

WONDERFLOOR

www.wonderfloor.co.in

STONELAND MONZA

2.00 mm



High Performance Luxury Vinyl Tiles



Fire
Resistant



Termite
Proof



Environment
Friendly



Moisture
Proof



PUR guard for
low maintenance
& surface
protection
against dirt

Image is for illustration purposes only, actual shade may vary in shade and appearance


STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions

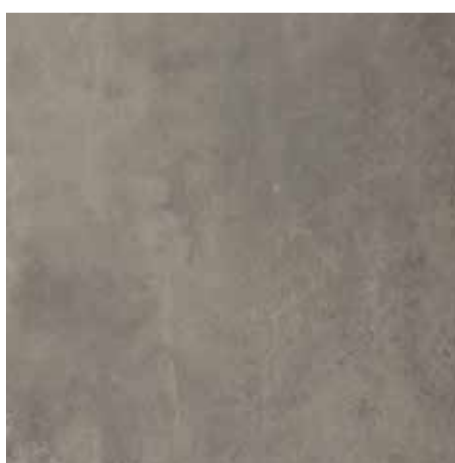

457.2 mm (18 inch)

STN 01

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 02

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 03

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 04

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 05

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions




457.2 mm (18 inch)

STN 06

STONELAND MONZA

2.00 mm

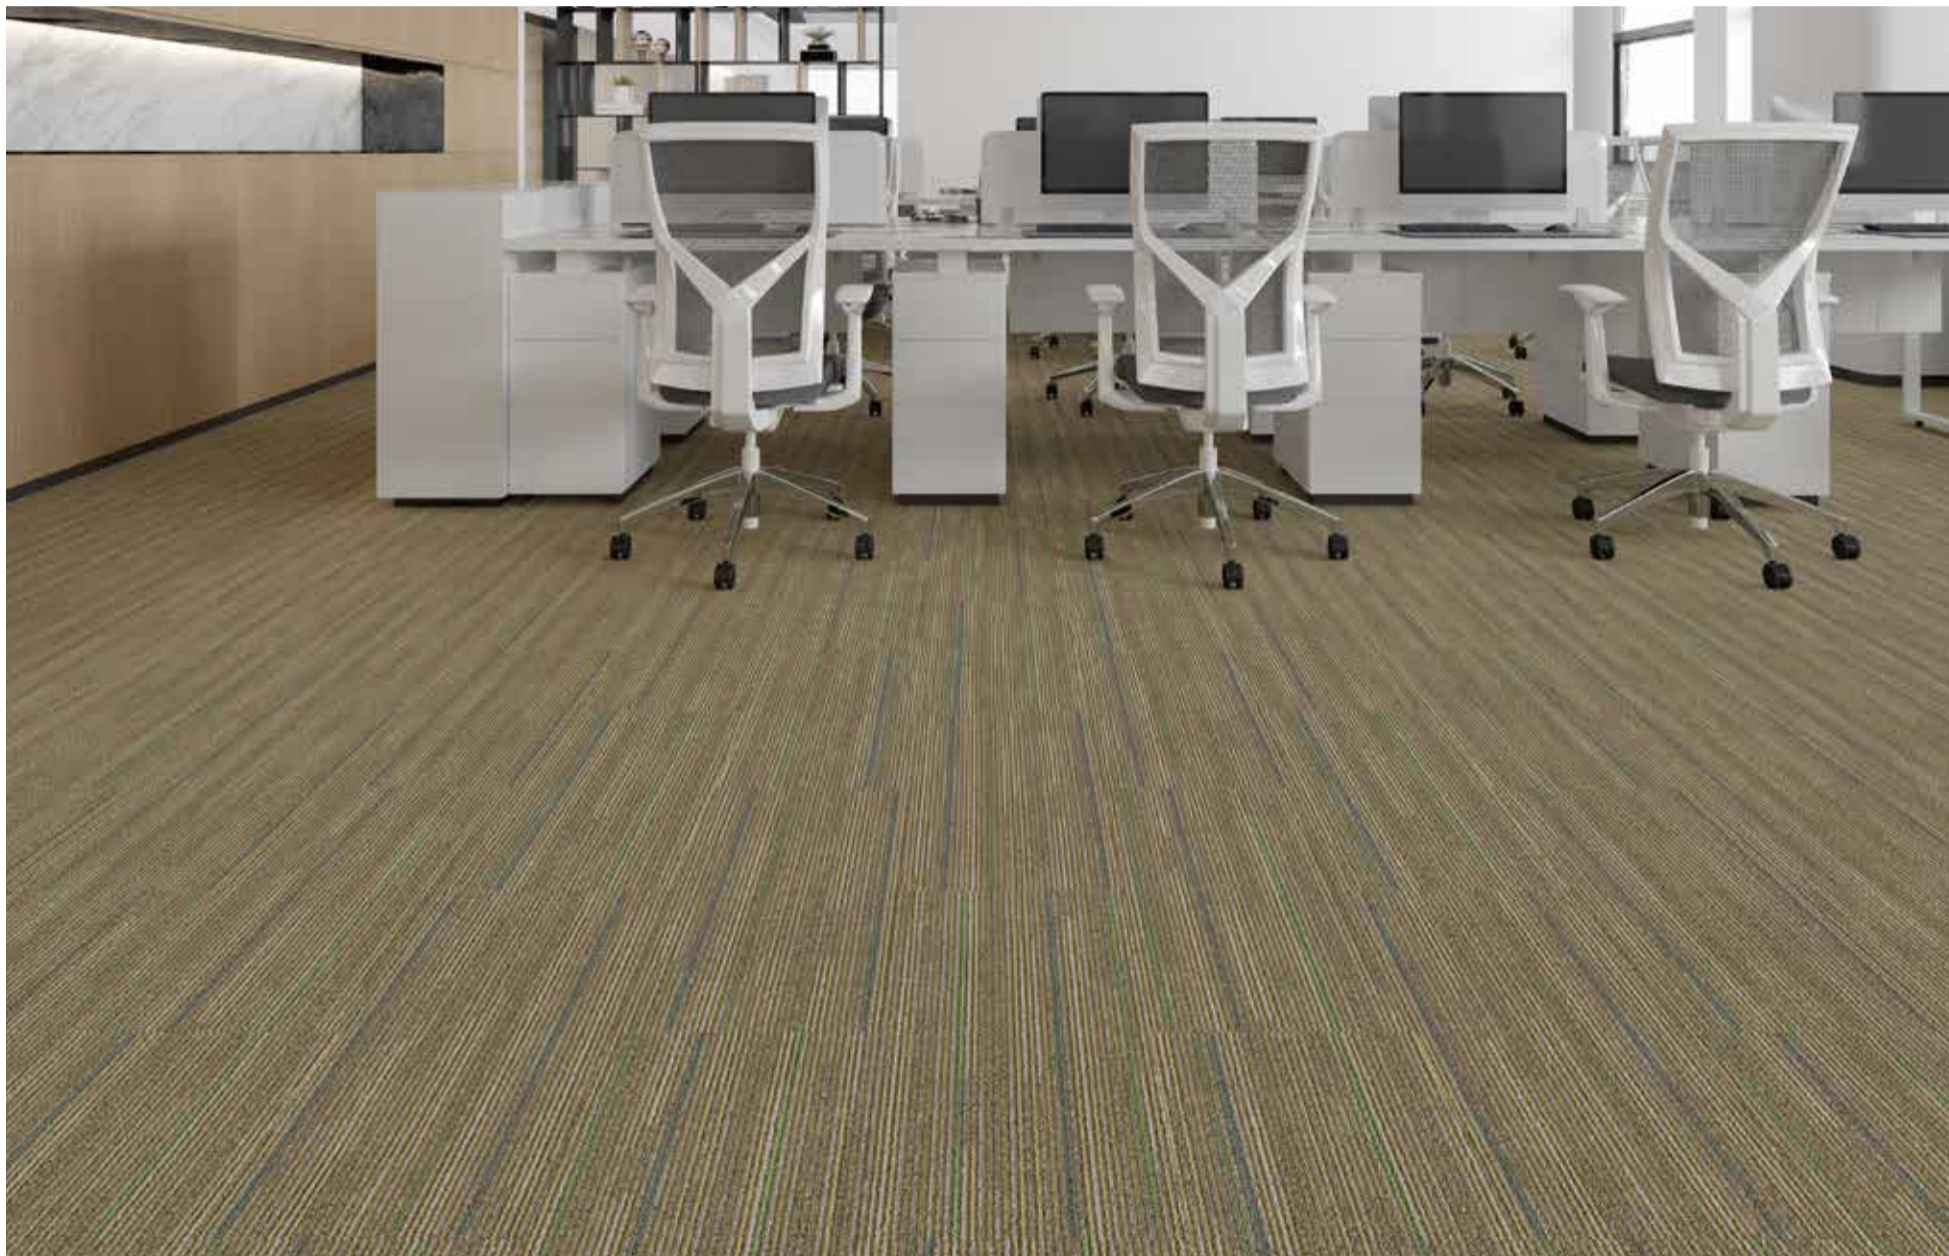

457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 07

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 08

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)

Dimensions



457.2 mm (18 inch)

STN 09

STONELAND MONZA

2.00 mm



457.2 mm (18 inch)



457.2 mm (18 inch)

STN 10

457.2 mm (18 inch)



457.2 mm (18 inch)

STN 12

STONELAND MONZA

2.00 mm

457.2 mm (18 inch)



457.2 mm (18 inch)

STN NX 11

WONDERFLOOR

STONELAND MONZA

2.00 mm

457.2 mm (18 inch)



457.2 mm (18 inch)

STN NX 14

STONELAND MONZA are the latest collection of PVC stone tiles. The shades and designs are carefully chosen to complement the natural stone. Manufactured with multi-layer hot press technology, this premium flooring is highly suitable to handle heavy footfalls. The PUR protection layer ensures trouble free performance and enhance durability. Stoneland Monza reduces the noise impact, is trendy, quick to install, easy to use and maintenance free. Finally, Stoneland Monza are termite resistant, moisture resistant & fire resistant. Stoneland Monza tiles are recommended for hotels, stores, malls, cafeteria, auditorium, schools, banks, offices etc.

PERFORMANCE CHARACTERISTICS

| CHARACTERISTICS | TEST METHOD | RESULTS |
|------------------------------------|------------------------|---|
| TYPE OF FLOORING | EN 649 | RESILIENT FLOORING |
| OVERALL THICKNESS (mm) | EN 428/IS: 3464 | 2.0 mm* |
| DIMENSION (SIZE) | EN 427/IS: 3464 | 457.2mm X 457.2mm (18" X 18")** |
| SQUARENESS | IS: 3464 | ≤ 0.15 mm |
| WEAR LAYER | | 0.20 mm (Heavy duty) |
| DENSITY | EN 430 | 3650g/m ² |
| DIMENSIONAL STABILITY | EN 434 | ≤ 0.25 % |
| RESIDUAL INDENTATION | EN 433 | ≤ 0.10 mm |
| COLOR FASTNESS | ISO 105 B02 | CLASS 6 |
| FIRE RATING | EN 13501 - 1 | BflS1 |
| HORIZONTAL & VERTICAL BURNING TEST | IS 15061 - 2002 | PASS (ARAI) |
| PERFORMANCE CLASSIFICATION | EN 685 | 34/41 |
| ABRASION RESISTANCE | EN 660-2 | Wear Group P |
| SOUND ABSORPTION | ISO 140-8/EN ISO 717-2 | ΔLW=5db |
| SLIP RESISTANCE | DIN 51130 | R9 |
| BEARING CASTOR CHAIR | EN 425 | SUITABLE / CONTINUOUS USE |
| SURFACE PROTECTION | PUR | PUR |
| MOISTURE MOVEMENT | APPENDIX B OF IS: 3462 | ≤ 0.40% |
| RESISTANCE TO STAINING | EN 423 | PASS |
| PATTERN | | STONE |
| NO. OF PCS PER BOX & AREA OF BOX | | 20 PCS/BOX (1 BOX = 4.18 SQ. MTR /45 SQ.FT) |

*Thickness: 1.5 mm / 3.0 mm can be produced against bulk quantity orders.

**Tile sizes: 300 mm x 300mm / 228.60 mm x 914.40 mm can be produced against bulk quantity orders.



RECOMMENDATION FOR INSTALLATION

Wonderfloor Vinyl Plank must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com or call : +91 9015313059 (Available between 10am-6.30pm)

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

